


American Standard

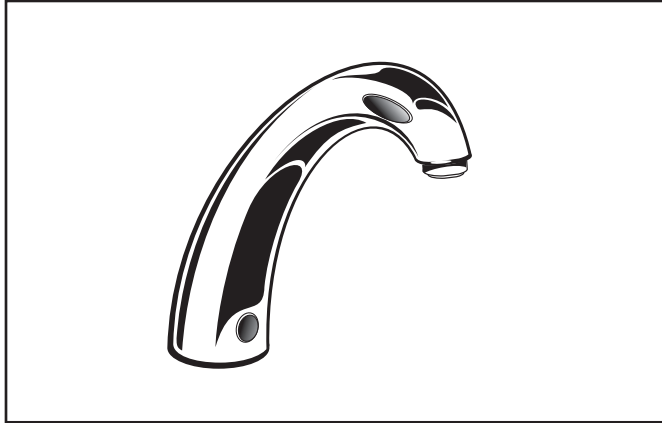

GENERAL DESCRIPTION:

Electronic faucet with proximity operation. Coloured LEDs signal temperature change mode. Vandal resistant solid brass construction single post mounting. Operates on AC permanent power. Water pressure range from 20 to 125 psi. In-line strainer for solenoid is integral. Single inlet 3/8" (10mm) compression, built-in checks, and flexible stainless steel 20" (508mm) reach inlet hose for spout connection.

PRODUCT FEATURES:

Vandal-Resistant Brass Body: Durable - Excellent in high use applications.

Power Options:

• **Plug-In - Integral** low voltage transformer (115 VAC supply) with 5 foot (1524mm) power supply.

Easy and flexible installation:

Single post mounting with optional 4" (102mm) and 8" (203mm) Deck plate. Water resistant solenoid enclosure mounts to wall.

Integrated; easy service Strainer:

Patented integrated strainer enclosed in removable debris cup protects the solenoid valve and aerator from debris. Perforated stainless steel strainer is low maintenance and can be easily accessed.

End Device:

Choice of 1.84 gpm/8.3 L/min Vandal resistant aerator or 0.5 gpm/1.9 L/min Vandal resistant aerator.

CODES AND STANDARDS:

These products meet or exceed the following coded standards:

- ANSI A117.1
- ASME A112.18.1
- CSA B 125

 **ADA Compliant**

COMMERCIAL

CERATRONIC™ ELECTRONIC PROXIMITY SINK FAUCET with Touch-free Temperature Control and Selectronic™ Technology

MODEL NUMBER:

- **DC POWERED; single inlet**
 - **6058 105** with cast spout, 0.5 gpm/1.9L/min. vandal resistant aerator.
 - **6058 102** with cast spout, 1.84 gpm/8.3L/min. vandal resistant aerator.
- **OPTIONAL 4"(102mm) or 8"(203mm) Deck Plates**
 - **605P 400** 4"(102mm) brass deck plate with 1/4"(6mm) fixation studs and quick spin nuts. 6-1/8" x 2-1/8" x 1/2" (156 x 54 x 13mm)
 - **605P 800** 8"(203mm) brass deck plate with 1/4"(6mm) fixation studs and quick spin nuts. 10-1/8" x 2-3/8" x 1/2" (257 x 60 x 13mm)

